

- Dry ceramic sensor
- Ranges from 40 mbar to 250 bar
- Global error < 0,2%* F.S.
- High overload capability
- Analog output: 4...20 mA, 2-wire
- Ex I M2 EEx ia I
II 1G EEx ia IIC T4/T6
BVS 03 ATEX E 222



Pressure Transmitter IP 121

Technical data:

Range:	0...40 mbar to 0...250 bar
Output signal:	4...20 mA, 2-wire
Global error:	< 0,2%* F.S.
Response time:	200 ms (other available on request)
Supply voltage:	9...32V DC, max. 30 mA (12...30V Ex-version)
Ambient temperature:	-25...80 °C (-25...80 °C at EEx ia IIC T4) (-25...50 °C at EEx ia IIC T6)
Fluid temperature:	-40...100 °C (125 °C < 0,5h) (-25...80 °C at EEx ia IIC T4) (-25...50 °C at EEx ia IIC T6)
Thermal drift:	< 0,015%/K (zero) < 0,01%/K (span)
Long term stability:	< 0,15% F.S. .p. a.
Housing:	stainless steel, 1.4404
Sensor:	ceramic AL ₂ O ₃
Electr. connection:	DIN 43650 connector, IP 65 cable 2m/5m, IP 68 (1mWC)

Ranges

range	gauge	absolut	overload (bar)
0...40 mbar*	A8		- 0,3 / 4
0...50 mbar*	B0		- 0,3 / 4
0...60 mbar*	A9		- 0,3 / 4
0...100 mbar	00		- 0,3 / 4
0...160 mbar	01		- 0,6 / 5
0...200 mbar	B1	B2	- 1 / 6
0...250 mbar	02		- 1 / 6
0...0,4 bar	03		- 1 / 6
0...0,5 bar	B7		- 1 / 6
0...0,6 bar	04	29 ⁽¹⁾	- 1 / 10
0...1 bar	05	30	- 1 / 10
0...1,6 bar	06	31	- 1 / 18
0...2 bar	B3	B4	- 1 / 18
0...2,5 bar	07	32	- 1 / 18
0...4 bar	08	33	- 1 / 25
0...6 bar	09	34	- 1 / 40
0...10 bar	10	35	- 1 / 40
0...16 bar	11	36	- 1 / 40
0...20 bar	B5	B6	- 1 / 40
0...25 bar	12	37	- 1 / 40
0...40 bar	13	38	- 1 / 60
0...60 bar	14	39	- 1 / 100
0...100 bar*	15	40	- 1 / 250
0...160 bar*	16	41	- 1 / 400
0...250 bar*	17	42	- 1 / 600
-100...0 mbar	C4		- 0,3 / 4
-100...100 mbar	C5		- 1 / 6
-200...0 mbar	D2		- 1 / 6
-200...200 mbar	D3		- 1 / 6
-1...1 bar	D6		- 1 / 10
-1...3 bar	D8		- 1 / 25
-1...5 bar	D9		- 1 / 40
-1...9 bar	E1		- 1 / 40
-1...15 bar	E2		- 1 / 40
0,8...1,2 bar		B9	- 1 / 10

* Global error 0,5% F.S.

⁽¹⁾ not for EEx

Ordering code

Output signal

- 1 0...10V 3-wire
- 4 4...20 mA 2-wire
- H 4...20 mA 2-wire Hightemp -25°C...120°C
- E 4...20 mA 2-wire II 1G EEx ia IIC T4/T6
- M 4...20 mA 2-wire I M2 EEx ia I

Range

- Measurement range-see table
- 99 non-standard range (on request)

Process connection and material

- 2 ½ - 14 NPT, 1.4404
- D G ¼ A DIN 3852 1.4404
- 3 G ½ A DIN 16288 1.4404
- G G ½ A and 11,8 mm drill hole, 1.4404
- 4 G ½ A and G ¼ female, 1.4404
- 9 others (on request)

Sensor seal

- 1 FPM (Viton) Standard
- 2 NBR (Nitril)
- 3 EPDM
- 4 Fluor-Silicon
- 5 Kalrez
- 9 others (on request)

Electrical connection


- 1 DIN 43650 connector
- 4 DIN 43650 connector, potted electronic
- A Connector M12x1
- B Connector M12x1, potted electronic
- F Quickon Connector
- G Quickon Connector, potted electronic
- 0 5m cable, IP 68
- 5 5m cable, IP 68, potted electronic
- 6 2m cable, IP 68,
- 7 2m cable, IP 68, potted electronic
- 8 6 pin Mil connector
- 9 others (on request)

Options


- R Ceramic sensor 99,9% Al₂O₃
- T Minimized case volume
- RT Ceramic sensor 99,9% Al₂O₃ with minimized case volume

IP121-


Dimensions (mm)

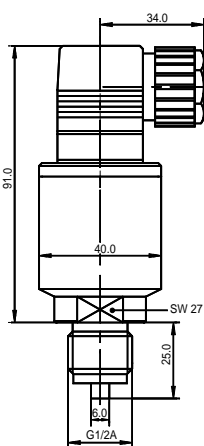


G 1/2 A DIN 16288

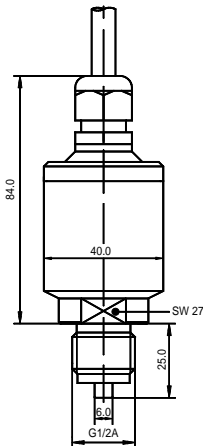


G 1/2 A DIN 16288



G 1/4 A




G 1/2 A



1/2-14 NPT


Electrical connections

DIN 43650 Connector



- 4...20 mA 2-wires
- PIN1 Signal +
- PIN2 Signal -
- 0...10V 3-wires
- PIN1 in +
- PIN2 in -
- PIN3 out +

Quickon-Connector




- 4...20 mA 2-wires
- PIN1 Signal +
- PIN2 Signal -
- 0...10V 3-wires
- PIN1 in +
- PIN2 in -
- PIN3 out +

M12x1, 4-pin Connector



- 4...20 mA 2-wires
- PIN1 Signal +
- PIN3 Signal -
- 0...10V 3-wires
- PIN1 in +
- PIN3 in -
- PIN4 out +

Cable connection



- 4...20 mA 2-wires
- red Signal +
- black Signal -
- 0...10V 3-wires
- red in +
- black in -
- white out +