


HySense® PR 110



Dimensions in mm

ISO 228 G1/4

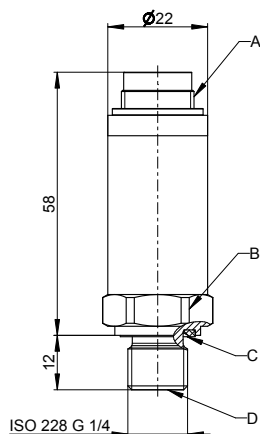

- | | |
|---|--|
| A | M16 x 0.75, 5-pin |
| B | AF 22 |
| C | ED seal in conformity with DIN 3869, FKM |

Characteristics

Output signal	4 ... 20 mA, 0 ... 10 VDC
Electrical connector	M16 x 0.75, 5-pin
Mechanical connection	ISO 228-G 1/4
IP degree of protection	IP67 (DIN EN 60529)
Weight	80 ... 100 g (depending on the version)

Part No.

Measuring range* bar	Color coding	Part No.	
		4 ... 20 mA	0 ... 10 VDC
-1 ... 6	Red	3403-32-C3.37	–
0 ... 60	Orange	3403-21-C3.37	–
0 ... 250	Yellow	3403-17-C3.37	3403-17-C3.39
0 ... 400	Blue	3403-15-C3.37	3403-15-C3.39
0 ... 600	Green	3403-18-C3.37	3403-18-C3.39
0 ... 1000	–	3403-29-C3.37	–